

KARTUŞLU ÇELİK GAZ FİLTRESİ



KAYAMAK

CE



CAPACITY TABLE


CONDITIONS

$\rho = 0,61 \text{ kg/m}^3$ & $T = 15 \text{ C}$
 $\Delta P = 100 \text{ mbar}$ & $V_{\text{outlet}} = 25 \text{ m/s (max.)}$

ÇALIŞMA BASINCI / OPERATING PRESSURE (BAR)

EBAT SIZE	0,5	1	2	3	4	6	10	12	19
DN25	72	96	144	192	240	336	527	623	958
DN32	108	143	215	286	357	500	785	928	1427
DN40	167	223	333	444	555	776	1219	1440	2215
DN50	276	367	549	732	914	1279	2008	2373	3649
DN65	392	522	781	1040	1300	1818	2855	3374	5188
DN80	607	808	1210	1611	2013	2815	4421	5224	8034
DN100	1048	1394	2086	2778	3471	4855	7625	9009	13855
DN125	1635	2175	3256	4336	5417	7578	11899	14060	21624
DN150	2377	3163	4734	6304	7875	11017	17301	20443	31439
DN200	4115	5474	8193	10912	13632	19070	29946	35384	54418

- ÇALIŞMA BASINCI: 19,3 BAR'A KADAR
- ÇALIŞMA SICAKLIĞI: -30°C / 60°C
- FLANŞ: PN16 VEYA ANSI150 RF
- GÖVDE MALZEMESİ: ASTM A 106 GR. B
- FİLTRE MALZEMESİ: POLYESTER
- PARTİKÜL TUTMA KAPASİTESİ: 5 µm & SONRASI
- KARTUŞ TIPLERİ: G0,5 - G1 - G1,5 - G2
G2,5 - G3 - G4 - G5

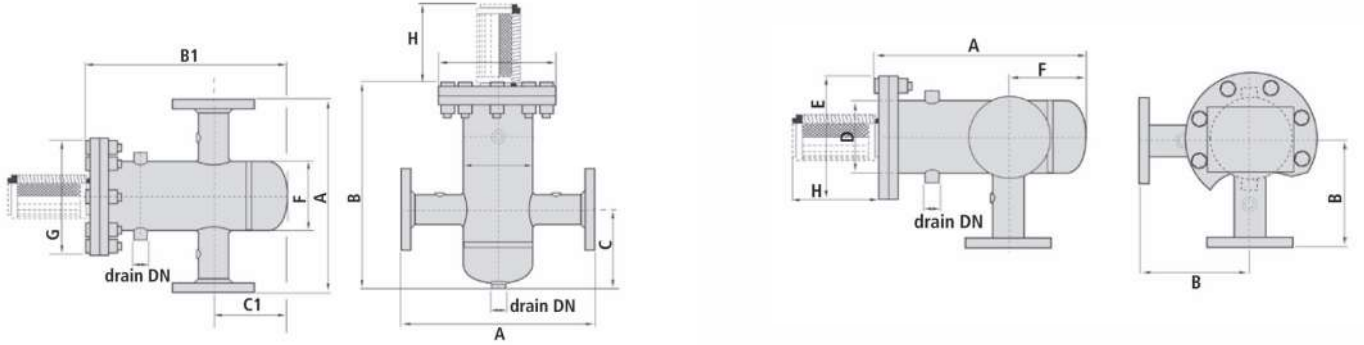

KYF STEEL FILTER STRAIGHT - OVERALL DIMENSIONS

EBAT SIZE	A	B	B1	C	C1	F	G	H
DN25	360	350	330	152	132	114,3	220	120
DN32	360	380	360	160	140	114,3	220	120
DN40	400	445	425	175	155	141,3	250	165
DN50	400	445	425	175	155	141,3	250	165
DN65	420	520	500	207	187	168,3	285	210
DN80	420	520	500	207	187	168,3	285	210
DN100	500	650	630	233	213	219,1	340	270
DN125	600	750	730	277	257	273,0	405	283
DN150	650	800	780	310	290	323,8	460	320
DN200	810	1000	980	360	340	406,4	580	415

KYF STEEL FILTER VERTICAL (90°) - OVERALL DIMENSIONS

EBAT SIZE	A	B	D	E	F	H
DN25	330	132	114,3	220	132	120
DN32	360	140	114,3	220	140	120
DN40	425	155	141,3	250	155	165
DN50	425	155	141,3	250	155	165
DN65	500	187	168,3	285	187	210
DN80	500	187	168,3	285	187	210
DN100	630	213	219,1	340	213	270
DN125	730	257	273,0	405	257	283
DN150	780	290	323,8	460	290	320
DN200	980	340	406,4	580	340	415