

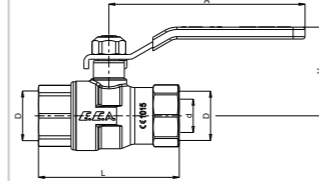


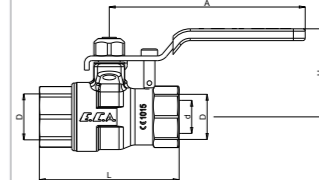



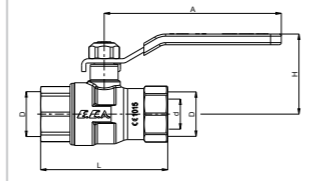
DOĞALGAZ KÜRESEL VALFLERİ - MOP 0.5 (Bina İçi Doğalgaz Tesisatları için)

ÜRÜN	ÜRÜN KODU	ÜRÜN ADI	TEKNİK ÇİZİM	LİSTE FİYATI ₺	ÜRÜN KT. AD.																																			
 	602 122 151	1/2" DOĞALGAZ KÜRESEL VALFİ	 <table border="1"> <thead> <tr> <th>D</th> <th>d</th> <th>L</th> <th>A</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>Rp 1/2"</td> <td>14</td> <td>59.2</td> <td>82.5</td> <td>37.3</td> </tr> <tr> <td>Rp 3/4"</td> <td>19</td> <td>68.2</td> <td>82.5</td> <td>40.7</td> </tr> <tr> <td>Rp 1"</td> <td>24</td> <td>83</td> <td>100</td> <td>47.5</td> </tr> <tr> <td>Rp1 1/4"</td> <td>30</td> <td>97</td> <td>154.5</td> <td>64.3</td> </tr> <tr> <td>Rp1 1/2"</td> <td>38</td> <td>103</td> <td>154.5</td> <td>69.3</td> </tr> <tr> <td>Rp 2"</td> <td>47</td> <td>127</td> <td>185</td> <td>79.5</td> </tr> </tbody> </table>	D	d	L	A	H	Rp 1/2"	14	59.2	82.5	37.3	Rp 3/4"	19	68.2	82.5	40.7	Rp 1"	24	83	100	47.5	Rp1 1/4"	30	97	154.5	64.3	Rp1 1/2"	38	103	154.5	69.3	Rp 2"	47	127	185	79.5	46	24
	D	d		L	A	H																																		
	Rp 1/2"	14		59.2	82.5	37.3																																		
	Rp 3/4"	19		68.2	82.5	40.7																																		
	Rp 1"	24		83	100	47.5																																		
	Rp1 1/4"	30		97	154.5	64.3																																		
	Rp1 1/2"	38		103	154.5	69.3																																		
Rp 2"	47	127	185	79.5																																				
602 122 152	3/4" DOĞALGAZ KÜRESEL VALFİ	56	12																																					
602 122 153	1" DOĞALGAZ KÜRESEL VALFİ	91	15																																					
602 122 154	1 1/4" DOĞALGAZ KÜRESEL VALFİ	199	8																																					
602 122 155	1 1/2" DOĞALGAZ KÜRESEL VALFİ	265	6																																					
602 122 156	2" DOĞALGAZ KÜRESEL VALFİ	407	3																																					
		<ul style="list-style-type: none"> EN331-A1 CE belgelidir. Bina içi doğalgaz tesisatlarında kullanımı uygundur. 																																						


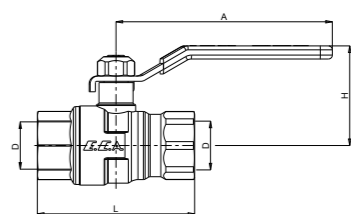
KİLİTLEMELİ DOĞALGAZ KÜRESEL VALFLERİ - MOP 0.5 (Bina İçi Doğalgaz Tesisatları için)

ÜRÜN	ÜRÜN KODU	ÜRÜN ADI	TEKNİK ÇİZİM	LİSTE FİYATI ₺	ÜRÜN KT. AD.																				
 	602 122 175	1/2" KİLİTLEMELİ DOĞALGAZ KÜRESEL VALF	 <table border="1"> <thead> <tr> <th>D</th> <th>d</th> <th>L</th> <th>A</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>Rp 1/2"</td> <td>14</td> <td>59.2</td> <td>83</td> <td>37.3</td> </tr> <tr> <td>Rp 3/4"</td> <td>19</td> <td>68.2</td> <td>83</td> <td>40.7</td> </tr> <tr> <td>Rp 1"</td> <td>24</td> <td>83</td> <td>100</td> <td>47.5</td> </tr> </tbody> </table>	D	d	L	A	H	Rp 1/2"	14	59.2	83	37.3	Rp 3/4"	19	68.2	83	40.7	Rp 1"	24	83	100	47.5	51	24
	D	d		L	A	H																			
	Rp 1/2"	14		59.2	83	37.3																			
	Rp 3/4"	19		68.2	83	40.7																			
Rp 1"	24	83	100	47.5																					
602 122 176	3/4" KİLİTLEMELİ DOĞALGAZ KÜRESEL VALF	64	12																						
602 122 177	1" KİLİTLEMELİ DOĞALGAZ KÜRESEL VALF	103	15																						
		<ul style="list-style-type: none"> EN331-A1 CE belgelidir. Bina içi doğalgaz tesisatlarında kullanımı uygundur. 																							

DOĞALGAZ KÜRESEL VALFLERİ - MOP 5 (Bina Dışı Doğalgaz Tesisatları için)

ÜRÜN	ÜRÜN KODU	ÜRÜN ADI	TEKNİK ÇİZİM	LİSTE FİYATI ₺	ÜRÜN KT. AD.																																			
	602 122 205	1/2" DOĞALGAZ KÜRESEL VALFİ	 <table border="1"> <thead> <tr> <th>D</th> <th>d</th> <th>L</th> <th>A</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>Rp 1/2"</td> <td>14</td> <td>59.2</td> <td>82.5</td> <td>37.3</td> </tr> <tr> <td>Rp 3/4"</td> <td>19</td> <td>68.2</td> <td>82.5</td> <td>40.7</td> </tr> <tr> <td>Rp 1"</td> <td>24</td> <td>83</td> <td>100</td> <td>47.5</td> </tr> <tr> <td>Rp1 1/4"</td> <td>30</td> <td>97</td> <td>154.5</td> <td>64.3</td> </tr> <tr> <td>Rp1 1/2"</td> <td>38</td> <td>103</td> <td>154.5</td> <td>69.3</td> </tr> <tr> <td>Rp 2"</td> <td>47</td> <td>127</td> <td>185</td> <td>79.5</td> </tr> </tbody> </table>	D	d	L	A	H	Rp 1/2"	14	59.2	82.5	37.3	Rp 3/4"	19	68.2	82.5	40.7	Rp 1"	24	83	100	47.5	Rp1 1/4"	30	97	154.5	64.3	Rp1 1/2"	38	103	154.5	69.3	Rp 2"	47	127	185	79.5	44	24
	D	d		L	A	H																																		
	Rp 1/2"	14		59.2	82.5	37.3																																		
	Rp 3/4"	19		68.2	82.5	40.7																																		
	Rp 1"	24		83	100	47.5																																		
	Rp1 1/4"	30		97	154.5	64.3																																		
	Rp1 1/2"	38		103	154.5	69.3																																		
Rp 2"	47	127	185	79.5																																				
602 122 206	3/4" DOĞALGAZ KÜRESEL VALFİ	53	12																																					
602 122 207	1" DOĞALGAZ KÜRESEL VALFİ	88	15																																					
602 122 208	1 1/4" DOĞALGAZ KÜRESEL VALFİ	194	8																																					
602 122 209	1 1/2" DOĞALGAZ KÜRESEL VALFİ	257	6																																					
602 122 210	2" DOĞALGAZ KÜRESEL VALFİ	395	3																																					
		<ul style="list-style-type: none"> EN331'e uygundur. Bina dışı doğalgaz tesisatlarında kullanımı uygundur. 																																						

İÇME SUYU KÜRESEL VALFLERİ - PN10

ÜRÜN	ÜRÜN KODU	ÜRÜN ADI	TEKNİK ÇİZİM	LİSTE FİYATI ₺	ÜRÜN KT. AD.																																			
	602 122 168	1/2" İÇME SUYU KÜRESEL VALFİ İÇ VE İÇ VİDA - TAM GEÇİŞLİ	 <table border="1"> <thead> <tr> <th>D</th> <th>d</th> <th>L</th> <th>A</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>Rp 1/2"</td> <td>Ø15</td> <td>60</td> <td>83</td> <td>38</td> </tr> <tr> <td>Rp 3/4"</td> <td>Ø20</td> <td>68.5</td> <td>83</td> <td>41.2</td> </tr> <tr> <td>Rp 1"</td> <td>Ø25</td> <td>83</td> <td>100</td> <td>47.5</td> </tr> <tr> <td>Rp1 1/4"</td> <td>Ø32</td> <td>96.1</td> <td>154.5</td> <td>64.3</td> </tr> <tr> <td>Rp1 1/2"</td> <td>Ø40</td> <td>109</td> <td>154.5</td> <td>71.25</td> </tr> <tr> <td>Rp 2"</td> <td>Ø50</td> <td>129</td> <td>185</td> <td>81.65</td> </tr> </tbody> </table>	D	d	L	A	H	Rp 1/2"	Ø15	60	83	38	Rp 3/4"	Ø20	68.5	83	41.2	Rp 1"	Ø25	83	100	47.5	Rp1 1/4"	Ø32	96.1	154.5	64.3	Rp1 1/2"	Ø40	109	154.5	71.25	Rp 2"	Ø50	129	185	81.65	46	24
	D	d		L	A	H																																		
	Rp 1/2"	Ø15		60	83	38																																		
	Rp 3/4"	Ø20		68.5	83	41.2																																		
	Rp 1"	Ø25		83	100	47.5																																		
	Rp1 1/4"	Ø32		96.1	154.5	64.3																																		
	Rp1 1/2"	Ø40		109	154.5	71.25																																		
	Rp 2"	Ø50		129	185	81.65																																		
602 122 169	3/4" İÇME SUYU KÜRESEL VALFİ İÇ VE İÇ VİDA - TAM GEÇİŞLİ	62	12																																					
602 122 170	1" İÇME SUYU KÜRESEL VALFİ İÇ VE İÇ VİDA - TAM GEÇİŞLİ	99	15																																					
602 122 182	1 1/4" İÇME SUYU KÜRESEL VALFİ İÇ VE İÇ VİDA - TAM GEÇİŞLİ	231	8																																					
602 122 183	1 1/2" İÇME SUYU KÜRESEL VALFİ İÇ VE İÇ VİDA - TAM GEÇİŞLİ	308	6																																					
602 122 184	2" İÇME SUYU KÜRESEL VALFİ İÇ VE İÇ VİDA - TAM GEÇİŞLİ	485	3																																					
		<ul style="list-style-type: none"> TS EN 13828 Çalışma sıcaklık Aralığı: -30°C +80°C 																																						